

Technical Data Sheet FiFo Monorail Rails

Product Description / Application: FiFo Monorail rails with a track width of 40 mm, available in various lengths



- Single-sided guiding of floor rollers with a roller width of up to 40 mm
- 8 mm grooves on both sides for additional mounting of signage and accessories
- Suitable for all roller types (rubber, polyamide, etc.)
- Aluminum profile with anodized surface

Ideally suited for:

- Staging lanes
- Setup of station systems
- Implementation of 5S projects

Technical Data:

- Material: Aluminum
- Color: Anodized EV1 Natural
- Harmonized standard: EN 15088:2005
- Elongation A5 (min): 8% (EN755-2)
- Tensile strength Rm (min): 195/215 MPa (EN755-2)
- Yield strength Rp0.2 (min): 150/160 MPa (EN755-2)
- Dimensional and shape tolerances: complies (EN 755-9, EN 12020-2)
- Application range: suitable for industrial purposes

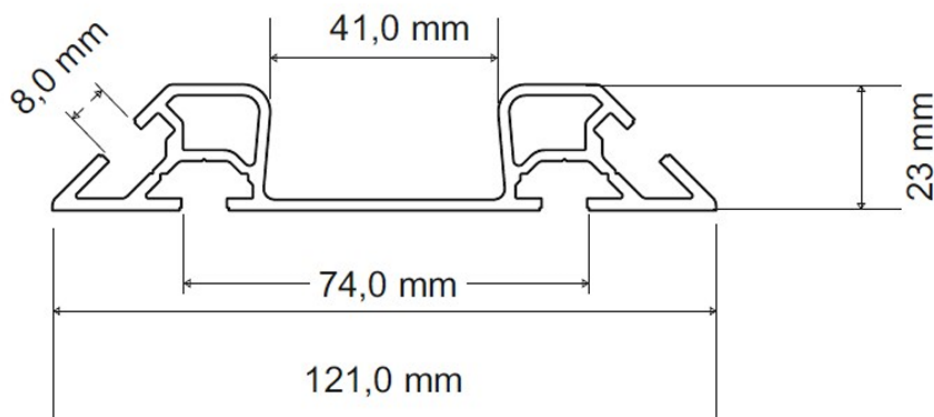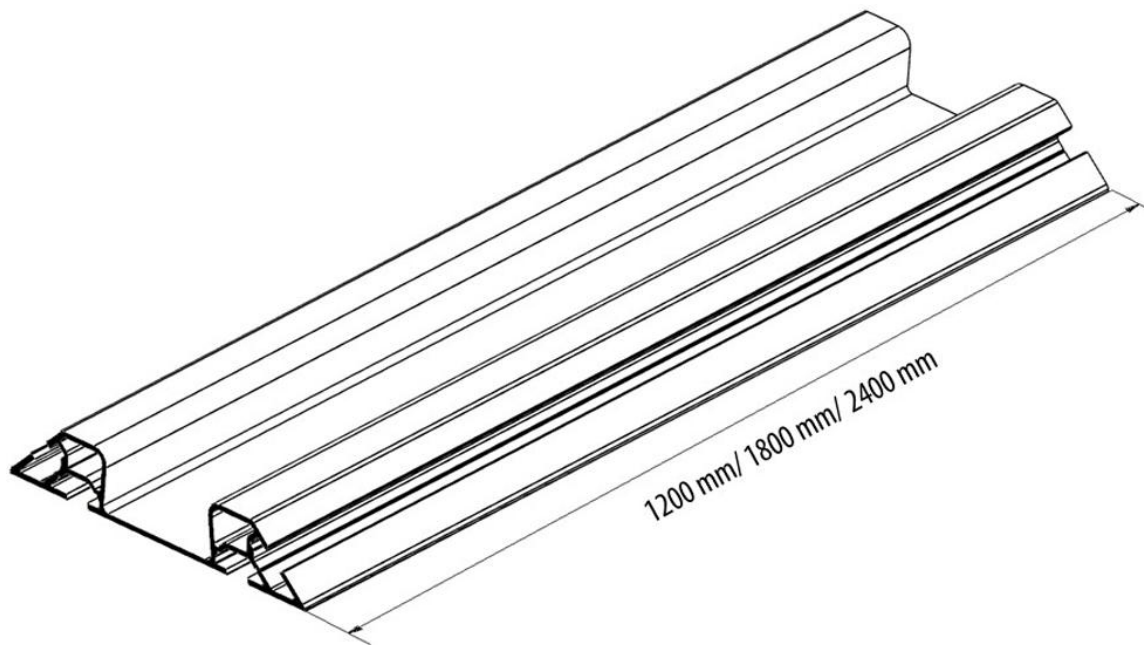

Warranty and Liability:

Our statements and recommendations are based on current knowledge. The values stated in our data sheets are typical or average values. Changes and additions may be made at any time. Since the use of our products is beyond our control, we assume no liability or warranty whatsoever. We would be happy to provide you with sample material for testing purposes.