

Technical Data Sheet **Stair nosing profile – Heavy Duty**

Product Description / Application:

Fibreglass anti-slip stair nosing profiles made of special glass-fibre-reinforced plastic (GRP). The anti-slip surface consists of sealed aluminium oxide grit. In addition to preventing slip accidents, the anti-slip profiles are also suitable for grating stairs.

- Flame-retardant and corrosion-free
- Suitable for indoor and outdoor use
- Wear-resistant and slip-safe, even with heavy foot traffic

Ideally suited for:

- Marking of hazardous areas
- Marking of escape routes
- Concealing damage to the stair edge

Technical Data:

Optimum bonding temperature: $\geq 12^{\circ}\text{C}$

Field of application: suitable for industrial purposes

Material: special glass-fibre-reinforced plastic


Thickness: 3.8 mm $\pm$ 0.1 mm

Slip resistance class: R13 according to DIN EN 16165

Mounting: screw-on with accessories, bondable with mounting adhesive

Temperature range: -20°C to $+70^{\circ}\text{C}$

Dimensions:

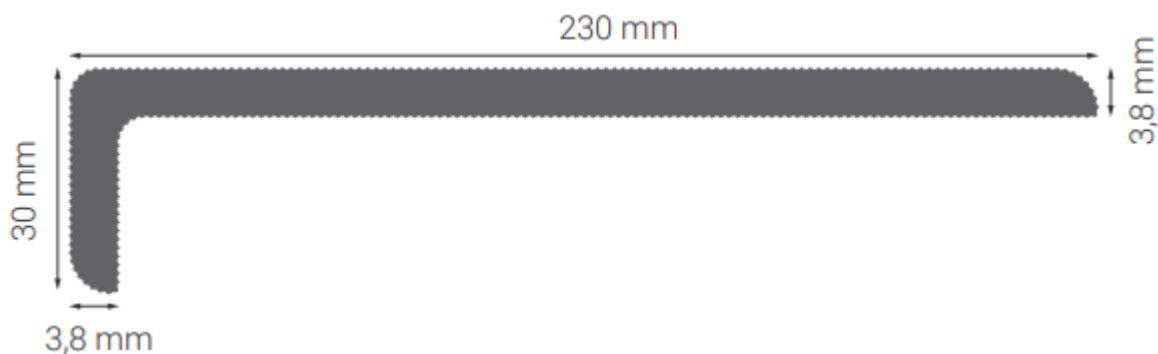

Processing Instructions: To achieve optimum adhesion when bonding the profiles, the substrate must be free of release agents such as greases, oils, surfactants, dirt and dust. Store dry and protected from UV light at +5 °C to +25 °C.

Warranty and Liability:

Our information and recommendations are based on current knowledge. The values stated in our data sheets are typical or average values. Changes and additions are possible at any time. As the use of our products is beyond our control, we accept no liability or warranty whatsoever. We will gladly provide sample material for testing purposes.